

# NEWLIFE WOODCARE

**Interior Clear Gloss & Satin** 

Product Code: NIC

# **Product description**

Designed for natural or stained interior timber surfaces. Haymes NewLife Interior Clear is a high-quality single pack, mineral turps based, general-purpose clear. It's resistant to heat, steam and household spillages. NOTE this product is not suitable for floors or high-wear surfaces.



## **Key Features**

- $\checkmark$  Tough, durable finish
- ✓ Enhances natural timber appearance
- ✓ Protects timber grain

#### Where to Use

Interior panelling, furniture, feature walls and trim.

Typical properties	
Gloss	Gloss 82 - 87 @ 20° Satin 20 - 25 @ 60°
Application tools	Brush, roller, spray
Clean-up	Mineral Turpentine
Dry time	Touch dry 6 hours Recoat 16 hours
Coverage	Up to 15m <sup>2</sup> /L
Colour	Clear
Sizes	1, 4L
VOC	Gloss: 448 g/L Satin: 456 g/L
Volume solids	Gloss: 44% Satin: 43%
Film build	Gloss – Wet: 66um / Dry: 29um Satin – Wet: 66um / Dry: 28um

Surface Preparation		
General Surface Preparation	<ol> <li>All timber surfaces must be clean, bare, dry and free of dirt, dust, grease and other contaminants.</li> <li>The presence of contaminants may cause rejection or delamination.</li> </ol>	
Timber	<ol> <li>Remove surface dust and dirt.</li> <li>Fill cracks, nail hokes and imperfections with Haymes Simply Woodcare Wood Putty. Do not use linseed oil putty.</li> <li>Allow to dry and sand smooth in the direction of the grain.</li> <li>If stain is required allow 24 hours for the stain to dry prior to application of the clear finish.</li> <li>Sand lightly between coats with 180-grit sandpaper.</li> </ol>	
Previously Painted, Stained, Oiled or Clear Coated Surfaces	<ol> <li>Sand and check for adhesion/compatibility prior to application.</li> <li>Apply to an inconspicuous sanded area.</li> <li>After 24 hours cut the surface with a sharp knife.</li> <li>Apply adhesive tape across the cut.</li> <li>Pull the tape off sharply.</li> <li>Removal of any coating indicates the surface must be thoroughly stripped.</li> </ol>	

## Application

DO NOT apply if temperature is below 10°C or above 30°C.

• Stir thoroughly before and during use.

• Apply two coats of Haymes NewLife Interior Clear. Sand lightly between coats.

• All times quoted assume ambient conditions of 25°C and 50% relative humidity. At cooler temperatures or higher humidity drying times will be extended.

#### Thinning

Thinning is not generally recommended. However, for spraying, thin using up to 100ml Mineral Turpentine per litre of NewLife Interior Clear.

## **Care and Maintenance**


Protect the coating against abrasive contact for 7 days. After 7 days the finish can be cleaned with a mild detergent solution and a soft cloth.

#### Storage

Protect from extremes of temperature. Store between 5°C and 30°C.

# Safety & First Aid

Read label before use. Keep out of reach of children. Flammable liquid and vapour. Harmful if inhaled. May cause drowsiness or dizziness. Avoid breathing vapours. IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Harmful in contact with skin. Causes skin irritation. IF ON SKIN OR HAIR: Take off immediately all contaminated clothing. Rinse skin with water/shower. Wash skin with plenty of soap and water. If skin irritation occurs get medical advice. IF IN EYES: Wash out immediately with water. In all cases of eye contamination it is a sensible precaution to seek medical advice. IF SWALLOWED: Rinse mouth with water. Do NOT induce vomiting. Give a glass of water. If symptoms develop or persist seek medical advice. Do not eat, drink or smoke when using this product. Wear protective gloves/protective clothing/eye protection. Wash exposed skin thoroughly after handling.

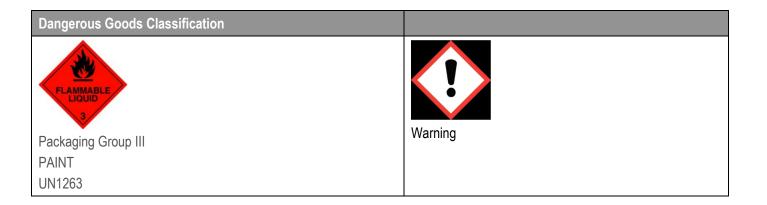

#### Protect our environment

DO NOT pour any leftover product down the drain. Retain in a marked sealed container for future use or disposal via special chemical waste collection programs. Dried empty containers can be recycled and should be disposed of via recycling facilities.

#### Manufacturer's comment

This product has been designed as part of a totally integrated application system. Use with any other manufacturer's product(s) or failing to follow application instructions, could result in detrimental effects on product performance, for which Henry Haymes Pty. Ltd. cannot be held responsible. Further information is available in the form of Safety Data and Product Information Sheets from Haymes Paint <u>www.haymespaint.com.au</u>. We are continually updating materials and methods, so please ensure you have the latest information.

#### Disclaimer

The information provided is correct at the time of preparation; however it is the responsibility of those using this information to check that it is current prior to specifying, recommending or using product contained in this information. Because use conditions and applicable laws may differ from one location to another and may change with time, those using this information are responsible for determining whether products and the information in this document are appropriate for their use and for ensuring that workplace and disposal practices are in compliance with applicable laws and other government enactments. Haymes Paint assumes no obligation or liability for the information in this document. No express warranties are given except for any applicable written warranties specifically provided by Haymes Paint. All implied warranties including those of merchantability and fitness for a particular purpose are expressly excluded.

Henry Haymes Pty Ltd A.B.N. 14 004 201 638 Waringa Drive Wendouree Industrial Estate Ballarat Vic 3350 Free call 1800 033 431 Free fax 1800 801 892 www.haymespaint.com.au

Date of Preparation 02/11/2016