


CONCRETE & PAVING PROTECTION

Haymes Non-Slip Additive

Product base code: QPPNS80/NSA400

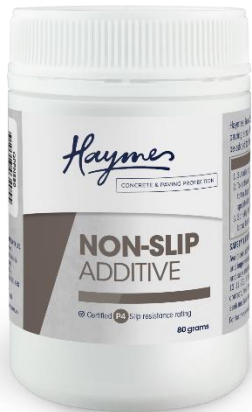

Product description

Haymes Non-Slip additive provides slip resistance for concrete and paving areas that can become slippery when wet. Non-Slip additive can be added to any of the Haymes Concrete & Paving Protection product topcoats, delivering a minimum certified P4 slip rating when applied at recommended mix rate.

Key features

Improves slip resistance

Simple stir in mixture

Adds a moderate texture

Certified slip rating.

Complies with minimum P4 rating



INTERIOR & EXTERIOR



DOSAGE: 20 GRAMS PER LITRE



APPLY IN 2 COATS



CERTIFIED NON-SLIP RATING

Where to use

Interior & Exterior: Driveways, garage flooring, interior flooring, paths, patios, pavers, pool surrounds, steps, walkways, warehouse & workshop floors.

Product properties

Colour	Transparent
Size	80 grams, 400 grams
Certifications & approvals	AS 4586:2013 Slip resistance classification of new pedestrian surface materials

Directions for use

- To achieve the certified slip rating Haymes Non-Slip Additive must be added to the topcoat at a ratio of 20 grams per litre. Two coats must be applied at the specified coverage rate for the topcoat.
- Sprinkle the additive into the paint in small amounts while stirring with a broad flat stirrer

Coating systems

Product	Non-slip ratings	Test standard	Mixing ratio	No. of coats
PaveShield	R12	Appendix D - Oil Wet Inclining Platform Test	20 grams per litre	2
	P5 Exterior	Appendix A - Wet Pendulum Test (slider 55)		
	P4 Interior	Appendix A - Wet Pendulum Test (slider 96)		
QuickPave	P5 Exterior	Appendix A - Wet Pendulum Test (slider 55)	20 grams per litre	2

QuickPave Garage Floor	R11 P4 Interior	Appendix D - Oil Wet Inclining Platform Test Appendix A - Wet Pendulum Test (slider 96)	20 grams per litre	2
------------------------	--------------------	--	--------------------	---

Haymes Non-Slip Additive has been tested for slip resistance according to AS 4586:2013 Slip Resistance classification of new pedestrian surface materials. Test certificates are available on request for the above coatings systems.

Storage

Containers must be secured and stored upright during transit. Protect from extremes of temperature. Store in a cool, dry, well-ventilated place and out of direct sunlight.

Safety & First Aid

Keep out of reach of children. Avoid contact with skin and eyes. Wear suitable, protective clothing, eye protection and impervious gloves when mixing and using. If swallowed, drink plenty of water and seek medical advice. Contact a doctor or Poisons Information Centre (Phone 13 11 26). If irritation develops or persists seek medical advice. In case of eye contact, hold eyes open and flush with running water for at least 15 minutes and seek medical advice.

Protect our environment

Do NOT pour any leftover product down the drain. Retain in a marked sealed container for future use or disposal via special chemical waste collection programs. Dried empty containers can be recycled and should be disposed of via recycling facilities.

Manufacturer's comment

This product has been designed as part of an integrated application system. Use with any other manufacturer's product(s) or failing to follow application instructions, could result in detrimental effects on product performance, for which Henry Haymes Pty. Ltd. cannot be held responsible. Further information is available in the form of Safety Data and Product Information Sheets from Haymes Paint www.haymespaint.com.au. We are continually updating materials and methods, so please ensure you have the latest information.

Disclaimer

The information provided is correct at the time of preparation; however, it is the responsibility of those using this information to check that it is current before specifying, recommending or using product contained in this information. Because use conditions and applicable laws may differ from one location to another and may change with time, those using this information are responsible for determining whether products and the information in this document are appropriate for their use and for ensuring that workplace and disposal practices comply with applicable laws and other government enactments. Haymes Paint assumes no obligation or liability for the information in this document. No express warranties are given except for any applicable written warranties specifically provided by Haymes Paint. All implied warranties including those of merchantability and fitness for a particular purpose are expressly excluded. Document valid unless superseded.

Henry Haymes Pty Ltd
A.B.N. 14 004 201 638
Waringa Drive
Wendouree Industrial Park
Ballarat Vic 3350
Free call 1800 033 431
www.haymespaint.com.au

Date of Preparation 21/07/2021
Supersedes Version with preparation date 30/10/2020.