


## PREMIUM SYNTHETIC GREASE LUBRICANT

### DESCRIPTION

**Premium Synthetic Grease** is manufactured from premium synthetic and paraffinic base oils with lithium complex base thickener, anti-rust, anti-corrosion, anti-oxidation and tackiness adhesive additives. The addition of extreme pressure additive, allows for a product that will not thicken as it resists oxidation and will not thin as its high shear stability resists grease breakdown.

### APPLICATIONS

Premium Synthetic Grease is used for all ball joints, universal joint, disc brakes, ball roller, needle and wheel bearings, pins and bushes in all automotive, marine, truck and agricultural and construction businesses.

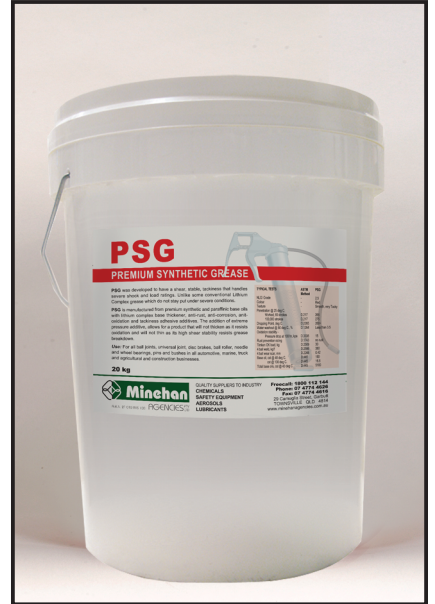

### TECHNICAL DATA

**FORM:** Grease  
**ODOUR:** Solvent  
**COLOUR:** Red  
**DETERGENCY:** N/A  
**TOXICITY:** Non-Toxic  
**WETTING ABILITY:** N/A  
**STORAGE ABILITY:** 2 Years  
**COLD STABILITY:** Stable

**FLASH POINT:** N/A  
**FLAME EXTENSION:** N/A  
**SOLUBILITY IN WATER:** Negligible  
**SPECIFIC GRAVITY:** 1.0g/ml  
**% VOLATILE BY VOLUME:** No  
**pH:** 7 - 8  
**EVAPORATION RATE:** Slow  
**BIODEGRADABILITY:** No

### DIRECTIONS FOR USE

Spray or Brush.