

Hazardous, Dangerous Goods

1. MATERIAL AND SUPPLY COMPANY IDENTIFICATION

Product name: Hitman

Synonyms Hitman - 5L Hitman - 5L x 3 carton **Product Code** CH160412 CH160414

Recommended use: Heavy Duty Solvent Based Floor Stripper for Solvent-Based Sealer Removal

Supplier:	XO2 Pty Ltd
ABN:	25 107 430 982
Street Address:	42 Junction Road
	Burleigh Heads
	Queensland 4220
Telephone:	1300 123 499
Email:	hello@xo2.com.au

Emergency Telephone number: 1300 123 499 (Business Hours: Mon - Fri, 8:00am - 4:30pm AEST)

2. HAZARDS IDENTIFICATION

This material is hazardous according to the criteria of Safe Work Australia GHS 7.



Signal Word

Danger

Hazard Classifications

Flammable Liquids - Category 3 Acute Toxicity - Oral - Category 4 Corrosive to Metals - Category 1 Skin Corrosion/Irritation - Category 1A Eye Damage/Irritation - Category 1 Sensitisation - Skin - Category 1 Specific Target Organ Toxicity (Single Exposure) - Category 1

Hazard Statements

- H226 Flammable liquid and vapour.
- H290 May be corrosive to metals.
- H302 Harmful if swallowed.
- H314 Causes severe skin burns and eye damage.
- H317 May cause an allergic skin reaction.
- H370 Causes damage to organs (eye/CNS).

Prevention Precautionary Statements

- P102 Keep out of reach of children.
 P103 Read carefully and follow all instructions.
 P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.
 P233 Keep container tightly closed.
 P234 Keep only in original packaging.
 P240 Ground and bond container and receiving equipment.
- P241 Use explosion-proof electrical, ventilating, lighting and all other equipment.



		i icip
P242	Use non-sparking tools.	
P243	Take action to prevent static discharges.	
P260	Do not breathe fume, mist, vapours or spray.	
P264	Wash hands, face and all exposed skin thoroughly after handling.	
P270	Do not eat, drink or smoke when using this product.	
P272	Contaminated work clothing should not be allowed out of the workplace.	
P280	Wear protective gloves/protective clothing including eye/face protection.	
Response Preca	utionary Statements	
P101	If medical advice is needed, have product container or label at hand.	
P301+P312	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell.	
P301+P330+P3	31 IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.	

IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water [or shower].
IF INHALED: Remove person to fresh air and keep comfortable for breathing.
IF IN EYES: Rinse cautiously with water for several minutes. Remove contact
lenses, if present and easy to do. Continue rinsing.
IF exposed or concerned: Call a POISON CENTER/doctor .
Immediately call a POISON CENTER/doctor.
Rinse mouth.
If skin irritation or rash occurs: Get medical advice/attention.
Take off contaminated clothing and wash it before reuse
Wash contaminated clothing before reuse.
In case of fire: Use carbon dioxide, dry chemical, foam, water fog to extinguish.
Alcohol resistant foam is the preferred firefighting medium but, if it is not available,
normal foam can be used. to extinguish.
Absorb spillage to prevent material damage.

Storage Precautionary Statements

P403+P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P406	Store in corrosive resistant container with a resistant inner liner.

Disposal Precautionary Statement

P501 Dispose of contents/container in accordance with local regulations.

Poison Schedule: S6. Poison

DANGEROUS GOOD CLASSIFICATION

Classified as Dangerous Goods by the criteria of the "Australian Code for the Transport of Dangerous Goods by Road & Rail" and the "New Zealand NZS5433: Transport of Dangerous Goods on Land".

Dangerous Goods Class:3Subrisk 1:8

3. COMPOSITION INFORMATION		
CHEMICAL ENTITY	CAS NO	PROPORTION
Benzenemethanol	100-51-6	30-60 %
Dipentene	138-86-3	10-30 %
Methanol	67-56-1	10-30 %
Potassium hydroxide	1310-58-3	<10 %
Ingredients determined to be Non-Hazardous		Balance
		100%

4. FIRST AID MEASURES



If poisoning occurs, contact a doctor or Poisons Information Centre (Phone Australia 131 126, New Zealand 0800 764 766).

Inhalation: Remove victim from exposure - avoid becoming a casualty. Remove contaminated clothing and loosen remaining clothing. Allow patient to assume most comfortable position and keep warm. Keep at rest until fully recovered. Seek medical advice if effects persist.

Skin Contact: Effects may be delayed. If skin or hair contact occurs, remove contaminated clothing and flush skin and hair with running water. If swelling, redness, blistering or irritation occurs seek medical assistance. For gross contamination, immediately drench with water and remove clothing. Continue to flush skin and hair with plenty of water (and soap if material is insoluble). For skin burns, cover with a clean, dry dressing until medical help is available. If blistering occurs, do NOT break blisters. If swelling, redness, blistering, or irritation occurs seek medical assistance.

Eye contact: Immediately irrigate with copious quantities of water for 15 minutes. Eyelids to be held open. Remove clothing if contaminated and wash skin. Urgently seek medical assistance. Transport to hospital or medical centre.

Ingestion: If swallowed, do NOT induce vomiting; rinse mouth thoroughly with water and contact a Poisons Information Centre. Urgent hospital treatment is likely to be needed. Give activated charcoal if instructed.

PPE for First Aiders: Wear gloves, face shield. Available information suggests that gloves made from should be suitable for intermittent contact. However, due to variations in glove construction and local conditions, the user should make a final assessment. Always wash hands before smoking, eating, drinking or using the toilet. Wash contaminated clothing and other protective equipment before storing or re-using.

Notes to physician: Treat symptomatically. Effects may be delayed. Can cause corneal burns.

5. FIRE FIGHTING MEASURES

Hazchem Code: •3W

Suitable extinguishing media: If material is involved in a fire use alcohol resistant foam or dry agent (carbon dioxide, dry chemical powder).

Specific hazards: Flammable liquid and vapour. May form flammable vapour mixtures with air. Flameproof equipment necessary in area where this chemical is being used. Nearby equipment must be earthed. Electrical requirements for work area should be assessed according to AS3000. Vapour may travel a considerable distance to source of ignition and flash back. Avoid all ignition sources. All potential sources of ignition (open flames, pilot lights, furnaces, spark producing switches and electrical equipment etc) must be eliminated both in and near the work area. Do NOT smoke.

Fire fighting further advice: Heating can cause expansion or decomposition leading to violent rupture of containers. If safe to do so, remove containers from path of fire. Keep containers cool with water spray. On burning or decomposing may emit toxic fumes. Fire fighters to wear self-contained breathing apparatus and suitable protective clothing if risk of exposure to vapour or products of combustion or decomposition.

6. ACCIDENTAL RELEASE MEASURES

SMALL SPILLS

Wear protective equipment to prevent skin and eye contamination. Avoid inhalation of vapours or dust. Wipe up with absorbent (clean rag or paper towels). Collect and seal in properly labelled containers or drums for disposal.

LARGE SPILLS

If safe to do so, shut off all possible sources of ignition. Clear area of all unprotected personnel. Slippery when spilt. Avoid accidents, clean up immediately. Wear protective equipment to prevent skin and eye contamination and the inhalation of vapours. Work up wind or increase ventilation. Contain - prevent run off into drains and waterways. Use absorbent (soil, sand or other inert material). Use a spark-free shovel. Collect and seal in



properly labelled containers or drums for disposal. If contamination of crops, sewers or waterways has occurred advise local emergency services.

Dangerous Goods - Initial Emergency Response Guide No: 18

7. HANDLING AND STORAGE

Handling: Avoid eye contact and skin contact. Avoid inhalation of vapour, mist or aerosols.

Storage: Store in a cool, dry, well-ventilated place and out of direct sunlight. Store away from foodstuffs. Store away from incompatible materials described in Section 10. Store away from sources of heat and/or ignition. Store locked up. Store in corrosive resistant container with a resistant inner liner. Keep container standing upright. Keep containers closed when not in use - check regularly for leaks.

This material is classified as a Class 3 Flammable Liquid, Class 8 Corrosive as per the criteria of the "Australian Code for the Transport of Dangerous Goods by Road & Rail" and/or the "New Zealand NZS5433: Transport of Dangerous Goods on Land" and must be stored in accordance with the relevant regulations.

This material is a Scheduled Poison Schedule 6 (Poison) and must be stored, maintained and used in accordance with the relevant regulations.

This product is a "Manufactured Product" as defined in the ADG Code.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

National occupational exposure limits:

	Т	WA	S	TEL	NOTICES
	ppm	mg/m3	ppm	mg/m3	
Methyl alcohol	200	262	250	328	Sk
Potassium hydroxide	-	2 Peak	-	-	-
		limitation			

As published by Safe Work Australia.

TWA - The time-weighted average airborne concentration over an eight-hour working day, for a five-day working week over an entire working life.

STEL (Short Term Exposure Limit) - the average airborne concentration over a 15 minute period which should not be exceeded at any time during a normal eight-hour workday.

'Sk' Notice - absorption through the skin may be a significant source of exposure. The exposure standard is invalidated if such contact should occur.

These Exposure Standards are guides to be used in the control of occupational health hazards. All atmospheric contamination should be kept to as low a level as is workable. These exposure standards should not be used as fine dividing lines between safe and dangerous concentrations of chemicals. They are not a measure of relative toxicity.

If the directions for use on the product label are followed, exposure of individuals using the product should not exceed the above standard. The standard was created for workers who are routinely, potentially exposed during product manufacture.

Biological Limit Values: As per the "National Model Regulations for the Control of Workplace Hazardous Substances (Safe Work Australia)" the ingredients in this material do not have a Biological Limit Allocated.

Engineering Measures: Ensure ventilation is adequate to maintain air concentrations below Exposure Standards. Use only in well ventilated areas. Use with local exhaust ventilation or while wearing appropriate



respirator.

Personal Protection Equipment: GLOVES, FACE SHIELD.

Personal protective equipment (PPE) must be suitable for the nature of the work and any hazard associated with the work as identified by the risk assessment conducted.

Wear gloves, face shield. Available information suggests that gloves made from should be suitable for intermittent contact. However, due to variations in glove construction and local conditions, the user should make a final assessment. Always wash hands before smoking, eating, drinking or using the toilet. Wash contaminated clothing and other protective equipment before storing or re-using.

Hygiene measures: Keep away from food, drink and animal feeding stuffs. When using do not eat, drink or smoke. Wash hands prior to eating, drinking or smoking. Avoid contact with clothing. Avoid eye contact and skin contact. Avoid inhalation of vapour, mist or aerosols. Ensure that eyewash stations and safety showers are close to the workstation location.

9. PHYSICAL AND CHEMICAL PROPERTIES

Base Units:	Litres
Form:	Liquid
Colour:	Transparent brown
Odour:	Pine (mild)

Solubility: Specific Gravity: Density: Relative Vapour Density (air=1): Vapour Pressure: Flash Point (°C): Flammability Limits (%): Autoignition Temperature (°C): Melting Point/Range (°C): Boiling Point/Range (°C): pH: Viscosity: Total VOC (g/Litre): (Typical values only - consult specification sheet) N Av = Not available, N App = Not applicable

10. STABILITY AND REACTIVITY

Chemical stability: This material is thermally stable when stored and used as directed.

Conditions to avoid: This product should be kept in a cool place, preferably below 30°C. Keep containers tightly closed. Containers should be kept dry. Under no circumstances should the container be sealed. Keep away from sources of sparks or ignition. Keep isolated from combustible materials. Handle and open containers carefully.

Incompatible materials: Acids, oxidising agents, zinc, tin, aluminium and their alloys.

Hazardous decomposition products: Combustion forms carbon dioxide, and if incomplete, carbon monoxide and possibly smoke. Water is also formed. Potassium compounds. Carbon monoxide poisoning produces headache, weakness, nausea, dizziness, confusion, dimness of vision, disturbance of judgment, and unconsciousness followed by coma and death.

Hazardous reactions: No known hazardous reactions.



11. TOXICOLOGICAL INFORMATION

No adverse health effects expected if the product is handled in accordance with this Safety Data Sheet and the product label. Symptoms or effects that may arise if the product is mishandled and overexposure occurs are:

Acute Effects

Inhalation: Material may be an irritant to mucous membranes and respiratory tract.

Skin contact: Contact with skin will result in severe irritation. Corrosive to skin - may cause skin burns. A skin sensitiser. Repeated or prolonged skin contact may lead to allergic contact dermatitis.

Ingestion: Harmful if swallowed. Swallowing can result in nausea, vomiting, diarrhoea, abdominal pain and chemical burns to the gastrointestinal tract.

Eye contact: A severe eye irritant. Corrosive to eyes: contact can cause corneal burns. Contamination of eyes can result in permanent injury.

Acute toxicity

Inhalation: This material has been classified as not hazardous for acute inhalation exposure. Acute toxicity estimate (based on ingredients): $LC_{50} > 20.0 \text{ mg/L}$ for vapours or $LC_{50} > 5.0 \text{ mg/L}$ for dust and mist.

Skin contact: This material has been classified as not hazardous for acute dermal exposure. Acute toxicity estimate (based on ingredients): $LD_{50} > 2,000 \text{ mg/Kg bw}$

Ingestion: This material has been classified as a Category 4 Hazard. Acute toxicity estimate (based on ingredients): $300 < LD_{50} \le 2,000 \text{ mg/Kg bw}$

Corrosion/Irritancy: Eye: this material has been classified as a Category 1 Hazard (irreversible effects to eyes). Skin: this material has been classified as a Category 1A Hazard (irreversible effects to skin).

Sensitisation: Inhalation: this material has been classified as not a respiratory sensitiser. Skin: this material has been classified as a Category 1 Hazard (skin sensitiser).

Aspiration hazard: This material has been classified as not an aspiration hazard.

Specific target organ toxicity (single exposure): This material has been classified as a Category 1 Hazard.

Chronic Toxicity

Mutagenicity: This material has been classified as not a mutagen.

Carcinogenicity: This material has been classified as not a carcinogen.

Reproductive toxicity (including via lactation): This material has been classified as not a reproductive toxicant.

Specific target organ toxicity (repeat exposure): This material has been classified as not a specific hazard to target organs by repeat exposure.

12. ECOLOGICAL INFORMATION

Avoid contaminating waterways.

Acute aquatic hazard: This product is toxic to aquatic life with long lasting effects.

Long-term aquatic hazard: This product is toxic to aquatic life with long lasting effects.

Ecotoxicity: No information available.



Persistence and degradability: No information available.

Bioaccumulative potential: No information available.

Mobility: No information available.

13. DISPOSAL CONSIDERATIONS

Persons conducting disposal, recycling or reclamation activities should ensure that appropriate personal protection equipment is used, see "Section 8. Exposure Controls and Personal Protection" of this SDS.

If possible material and its container should be recycled. If material or container cannot be recycled, dispose in accordance with local, regional, national and international Regulations.

14. TRANSPORT INFORMATION

ROAD AND RAIL TRANSPORT

Classified as Dangerous Goods by the criteria of the "Australian Code for the Transport of Dangerous Goods by Road & Rail" and the "New Zealand NZS5433: Transport of Dangerous Goods on Land".

	FLAMMABLE LIQUID	<
UN No:	2924	
Dangerous Goods Class:	3	
Subrisk 1:	8	
Packing Group:	III	
Hazchem Code:	•3W	
Emergency Response Guide No:	18	
Limited Quantities	5 L	

Proper Shipping Name:


FLAMMABLE LIQUID, CORROSIVE, N.O.S.

Segregation Dangerous Goods: Not to be loaded with explosives (Class 1), flammable gases (Class 2.1), if both are in bulk, toxic gases (Class 2.3), spontaneously combustible substances (Class 4.2), oxidising agents (Class 5.1), organic peroxides (Class 5.2), toxic substances (Class 6.1), infectious substances (Class 6.2) or radioactive substances (Class 7). Exemptions may apply.

This product is a "Manufactured Product" as defined in the ADG Code.

MARINE TRANSPORT

Classified as Dangerous Goods by the criteria of the International Maritime Dangerous Goods Code (IMDG Code) for transport by sea. This material is classified as a Marine Pollutant (P) according to the International Maritime Dangerous Goods Code.

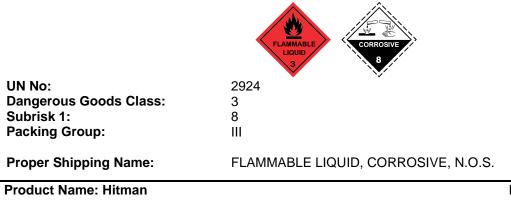



AIR TRANSPORT

Classified as Dangerous Goods by the criteria of the International Air Transport Association (IATA) Dangerous Goods Regulations for transport by air.

	FLAMMABLE LIQUID 3
UN No: Dangerous Goods Class: Subrisk 1: Packing Group:	2924 3 8 III
Proper Shipping Name:	FLAMMABLE LIQUID, CORROSIVE, N.O.S.

15. REGULATORY INFORMATION

This material is not subject to the following international agreements:

Montreal Protocol (Ozone depleting substances) The Stockholm Convention (Persistent Organic Pollutants) The Rotterdam Convention (Prior Informed Consent) Basel Convention (Hazardous Waste) International Convention for the Prevention of Pollution from Ships (MARPOL)

This material/constituent(s) is covered by the following requirements:

The Standard for the Uniform Scheduling of Medicines and Poisons (SUSMP) established under the Therapeutic Goods Act (Commonwealth): S6. Poison.

AICIS Status: All components of this product are listed on or exempt from the Australian Inventory of Industrial Chemicals (AIIC).

16. OTHER INFORMATION

Reason for issue: Change in Formulation

This information was prepared in good faith from the best information available at the time of issue. It is based on the present level of research and to this extent we believe it is accurate. However, no guarantee of accuracy is made or implied and since conditions of use are beyond our control, all information relevant to usage is offered without warranty. The manufacturer will not be held responsible for any unauthorised use of this information or for any modified or altered versions.

If you are an employer it is your duty to tell your employees, and any others that may be affected, of any hazards described in this sheet and of any precautions that should be taken.

Safety Data Sheets are updated frequently. Please ensure you have a current copy.